
# SESE Sec.10, NENE Sec 15 T36N R18E

## Township of Dunbar

Tract #3	31-23
Advertised #	
Contract #	
Contractor	
Acres to Cut	33

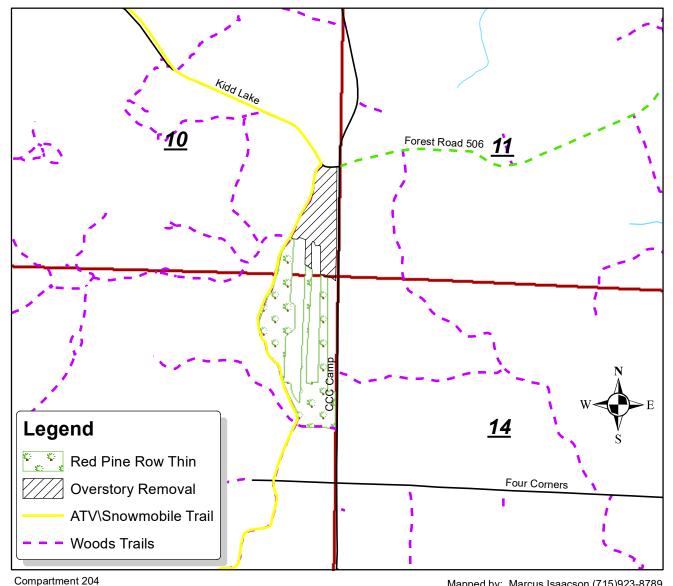

### Mapped by: Marcus Isaacson (715)923-8789

### **Red Pine Row Thin: 22 Acres**

- Cut all red pine in the rows marked with orange paint, every 3<sup>rd</sup> row.
- Cut all jack pine, oak, maple, cherry, aspen located within the red pine plantation.
- All conifer stumps must be treated for HRD between April 1 and November 30.

#### Overstory Removal – 11 Acres

- Cut all trees with a DBH of 5" and greater.
- Do not cut aspen regeneration and try to minimize residual damage.

### **Entire Sale**

- Do not forward or truck on the ATV/Snowmobile Trail.
- Merchantable aspen, maple and cherry will be scaled as mixed hardwood.

<b>Species</b>	<b>Estimated Volume</b>
Red Pine	200 Cords
Scrub Oak	100 Cords
Jack Pine	10 Cords
Mixed Hardwood	5 Cords